

### COMPRESSOR

Type	Semi Hermetic
Brand	BOCK
Model	HGX56e/995-4S
Total Quantity	4
Total Nominal Power	120 HP
Total Oil Quantity	14,4 l
Oil Type	Ester Oil

### CONDANSER

Cabin Type	Maxipack
Condanser Type	Monoblok
Cabin Model	W23X
Condanser Model	4xP3 A5A
Fin Type	Al Fin
Air Flow	110154 m <sup>3</sup> /h
Fan Diameter	800 mm
Number of Fan	6
Fan Speed	890 rpm
Fan Voltage	3 PH
-	-
Lubricate Control	Electronic Control

### ELECTRICAL DETAILS

Voltage	400V-3-50Hz
Max Operating Current	208,8 A
Max Power Consumption	102 kW

### CONNECTIONS

Suction Line Pipe	3x66 mm
Liquid Line Pipe	3x28 mm
Discharge Line Pipe	66 mm

### DIMENSIONS


Width	2100 mm
Lenght	3770 mm
Height	2400 mm

### WEIGHT

Weight of Device	0
Weight of Device with Packing	0

### NOISE LEVEL DATA

Sound Pressure Level at 10 m (LpA)	85 (dBA)
Sound Power Level (LwA)	85 (dBA)

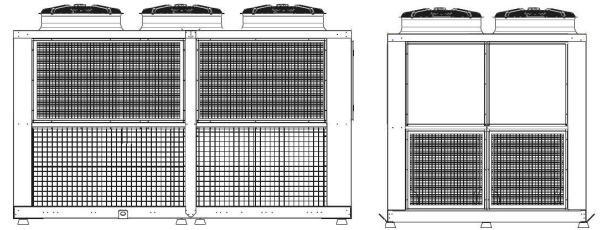

Cooling Capacity	: 158786 W
Power Input	: 78328 W
Refrigerant	: R404A
COP	: 2,03
Evaporation Temperature	: -10 °C
Condensation Temperature	: 50 °C
Suction Gas Temperature	: 20°C
Subcooling	: 0 °C
Ambient	: 41 °C

### SYSTEM COMPONENTS

Muffler	-
Discharge vibration absorber	-
Suction vibration absorber	-
Check Valve on Discharge Line	-
Suction Filter	-
Oil Seperator	-
Oil Tank and Oil Filter	-
Oil Pressure Switch	-
Electronic Oil Level Regulator	-
Suction Accumulator	-
Liquid Receiver	150 l
Filter Drier	-
HP Presostad	-
Dual Pressure Presostad	-
Pressure Manometer	-
Pressure Relief Valve	31 Bar
Oil Pressure Prosestad	-
Integrated Electrical Panel	-
Pack Controller	-
Overload relay	-
Circuit breaker	-
Phase failure relays	-
Main Electric Switch ON/OFF	-